



01 EAST ELEVATION



02 WEST ELEVATION

MATERIAL KEY

01. F10.112	Brickwork to Boundary walls	13. L10.550A	Glazed metal entrance Screen
02. H20.158	Cement Fibre Board cladding to Entrances and Underside of Window	14. L30.551	PPC coated vertical metal balustrade to balconies
03. H21.111	Vertical Timber Weather Boarding to Refuse Stores	15. L30.552	PPC coated metal balustrade to walkways
04. H42.110A	Recast Stone Panel with rebate pattern	16. H31.131A	PPC coated metal Canopy to Entrances
05. H42.110A	Recast Stone w/ recessed textured panel under window	17. Q35.380A	Precast columns to St. Eng. specification
06. H43.120A	PPC coated Cladding to Stair and Service roof upstands	18. M60.195	Anti slip finish to precast concrete walkways
07. H72.130A	PPC metal soffit to Balcony	19. N14.112	Planted zone to Landscape Architects Specification
08. H72.251	PPC coated metal Coping	20. N10.350C	Post boxes
09. J31.130A	Inverted Roof Coating		
10. L10.411	PPC coated composite window		
11. L10.413	PPC coated composite Balcony Doors		
12. L10.414	Timber Entrance Doors Flats		

REV	DATE	revision note:
-	21/09/11	revision note: Issued for Stage D
P01	02/12/11	revision note: Issue for stage E Brick base to Ground floor omitted & replaced with re-cast stone Reduced gully height on East elevation Window positions amended on gable end elevations Brick omitted from elevation to courtyard of the ancillary buildings (bicycle, refuse, recycling & bulky wasted stores) & replaced with timber construction Full height metal balustrade to core void Canopies to 4th floor flats entrance
P02	16/12/11	Issue for Stage E amendments; sheet title, references & windows updated; external door numbers added
P03	12/03/12	Precast conc. panel and wall depth amended note-location of ventilation grilles in abeyance
P04	15/06/12	Issued for stage F Door tag added, DFMA panels, key, annotations
P05	07/09/12	Updated following LOR comments, for Stage F Annotations added, key updated
C01	17/01/13	Issued for Construction, Titleblock note added, Legend type amended
C02	09/05/14	FINAL ISSUE


NOTE:
This drawing is the last revision issued for construction under the building contract. This drawing has not been verified by site survey and construction tolerances may have resulted in differences between this drawing and the finished building. The references on this drawing refer to details which were required for construction but may not have been updated to incorporate the final building design. The drawing has been given a revision reference and any specific comments are noted in the revision column.

- PLEASE REFER TO LANDSCAPE ARCHITECTS DRAWINGS FOR CLARIFICATION OF LANDSCAPE DESIGN
- FOR BLOCK SET OUT REFER TO DRAWING AHMM-WSQ-BLD-GA-0104
- PLEASE REFER TO DRAWING AHMM-WSQ-BLD-EC-GA-0200 FOR SETTING OUT OF BRICK WALLS IN LANDSCAPE

NB: CDP PACKAGES WHICH HAVE BEEN ISSUED FOR CONSTRUCTION WITHOUT PRIOR INPUT FROM TRADE CONTRACTORS REQUIRE FURTHER DEVELOPMENT BY TRADE CONTRACTOR, WHERE APPLICABLE, AS PER THE DRM, TRADE CONTRACTOR TO ISSUE FABRICATION DRAWINGS FOR REVIEW AND COMMENTS BY ARCHITECT, WHICH WILL BE RETURNED STAMPED WITH STATUS A, B OR C. TRADE CONTRACTOR NOT TO ORDER MATERIALS OR START FABRICATION PRIOR TO SHOP DRAWINGS HAVING ACHIEVED STATUS A.

NB: THESE DRAWINGS ARE TO BE READ IN CONJUNCTION WITH ALL RELEVANT SUBCONTRACTOR DRAWINGS. REFER TO EXPLORE / DELTA / NORDAN DRAWINGS FOR SPECIFICS OF CONCRETE FRAMES AND PANELS, SMARTWALL DETAILS, METALWORK AND GLAZING AND WINDOWS.

NOTE:
1. Do not scale from this drawing.
2. All dimensions to be checked on site by the contractor and such dimensions to be his responsibility.
3. Report all drawing errors, omissions and discrepancies to the architect.
4. This document may be issued in an uncontrolled CAD format to enable others to use it as background information to make alterations and/or additions. In that instance the file will be accompanied by a PDF version. It is for those making such alterations and additions to ensure that they make use of current background information. AHMM Ltd accepts no liability for any such alterations or additions to the background information or arising out of changes to background information which occur prior to alterations of additions being made.

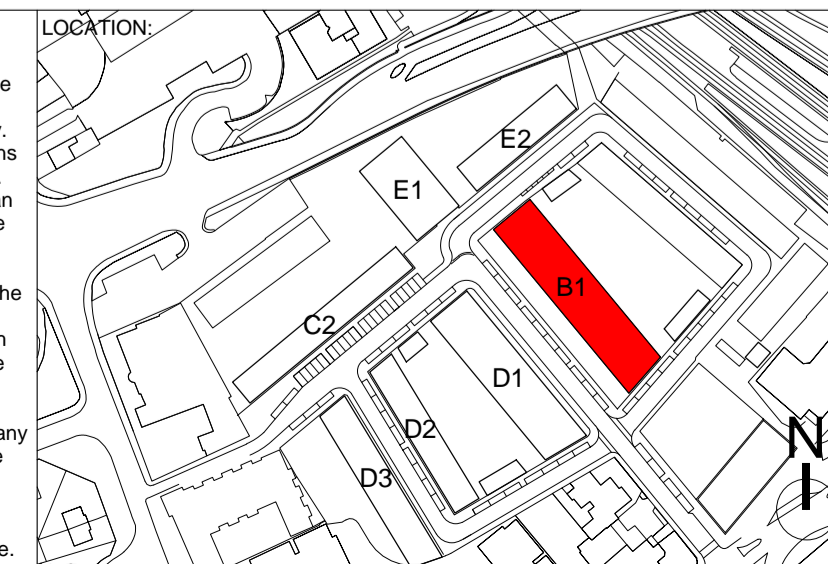

ALLFORD HALL MONAGHAN MORRIS
 ARCHITECTS Ltd
 2ND FLOOR, BLOCK C, 5-23 OLD STREET LONDON EC1V 9HL
 TEL 020 7251 5261 FAX 020 7251 5123 WEB WWW.AHMM.CO.UK

job title
WILLIAM STREET QUARTER
 drawing title / location
BLOCK B1
WEST + EAST ELEVATION

drawn by checked scale job status
 DG CM 1 : 100@A1; 1:200@A3 10154 FINAL
 drawing no. AHMM-WSQ-B1-EL-0201 revision
C02