


Construction Details

1. Outer wall
 22 x 40 mm. preweathered robinia moldings, distance: 8 mm.
 "reglar"
 8 mm. cement fibreboard, black
 50 mm. hard insulation (for the climate)
 190 mm. insulation
 2 x 13 mm. gypsum fibreboard

2. Windowsill:
 aluminum frame
 with triple glazing, two are safety glass

The indoor frame is 45 mm Kerto

Day Care Centre Råå

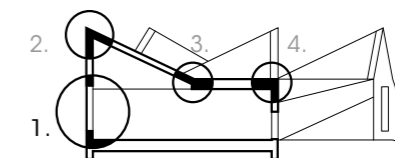

section AA Detail 1 scale 1:5